



MÀN HÌNH TINH THỂ LỎNG

**VX3276-2K-mhd**


## Key Features

Premium Design | Brilliant WQHD  
Resolution | SuperClear® IPS Technology  
| Billions of Colors | ViewMode  
Optimized Settings



## Product Description

The ViewSonic VX3276-2K-mhd is the perfect blend of style and performance with features that include a sizeable 32" frameless bezel, a minimalist design, and WQHD (2560 x 1440) resolution. Design features such as an ultra-slim profile, metallic silver triangle stand, and a sleek edge-to-edge frameless bezel give the monitor a premium feel that fits nicely both at home and in the office. VX3276-2K-mhd leverages IPS panel technology and rich 10-bit color to produce an extensive array of vibrant colors with wide viewing angles. Stereo sound is provided by the monitor's dual integrated speakers, while DisplayPort, Mini DP, and 2 HDMI ports offer flexible connectivity options for both general usage and gaming.

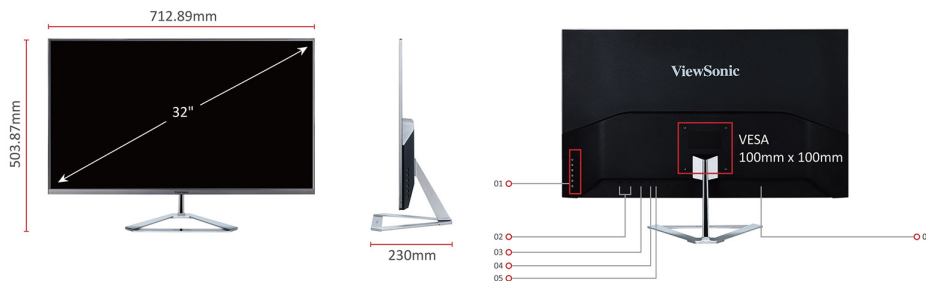

1. Menu Controls
2. HDMI(x2)
3. DisplayPort
4. Mini DisplayPort
5. Earphone
6. DC In

Visit Us  [www.viewsonic.com](http://www.viewsonic.com)

**LCD PANEL**

Monitor Size:	32"W (31.5" Viewable)
Panel Technology:	IPS, a-si TFT Active Matrix LCD
Resolution:	2560 x 1440
Display Area:	698.11mm (H) x 392.68mm (V)
Aspect Ratio:	16:9
Brightness:	250 cd/m <sup>2</sup> (Typ)
Contrast Ratio:	1200:1 (Typ)
Dynamic Contrast Ratio:	80,000,000:1
Viewing Angle:	178 degrees / 178 degrees (Typ)
Response Time:	3ms
Backlight:	1 LED light bar
Backlight Life:	30,000 Hrs (Min)
Colours:	1.07 Billion colors (10 bits color depth)
Colour Gamut:	75% of NTSC (Typ)
Panel Surface:	Anti-Glare type, Hard-coating (3H), Haze 25%
Pixel Pitch:	0.273mm (H) x 0.273mm (V)

**INPUT SIGNAL**

Frequency:	HDMI:Fh = 15 ~ 113KHz ; Fv = 24 ~ 75Hz DisplayPort:Fh = 24 ~ 113KHz ; Fv = 50 ~ 75Hz Mini DP:Fh = 24 ~ 113KHz ; Fv = 50 ~ 75Hz
Sync:	HDMI:TMDS DisplayPort:PCI-E Mini DP:PCI-E

**COMPATIBILITY**

PC:	Windows 7, Windows 8, Windows 8.1, Windows 10 certified
Mac®:	Power Mac tested

**CONNECTOR**

Digital:	HDMI x 2 (v1.4 compatible) DisplayPort x 1 (v1.2 compatible) Mini DP x 1 (v1.2 compatible)
Audio Out:	Earphone out x 1 (3.5mm plug)

**SPEAKERS**

2W x 2	
--------	--

**POWER**

Power:	3-pin plug (CEE22) x 1
Voltage:	AC 100-240V (Universal); 50/60Hz
Consumption:	43W
Optimize:	41W
Conserve:	36W

**ERGONOMICS**

Tilt:	15 ~ -4 degrees
-------	-----------------

**SPECIAL FEATURES**

DDC/2B, DDC/CI, HDCP, Detachable Base, KENSINGTON Microsaver Security Compatible, Flicker Free.

**WALL MOUNT**

VESA®:	100mm x 100mm
--------	---------------

**OPERATING CONDITIONS**

Temperature (° F / ° C):	32°F to 104°F (0°C to 40°C)
Humidity:	20% to 90% (no condensation)

**DIMENSIONS (W X H X D) (MM)**

Physical with stand (mm):	712.89mm (W) x 503.87mm (H) x 230mm (D)
Physical without stand (mm):	712.89mm (W) x 416.4mm (H) x 38.2mm (D)
Packaging (mm):	785mm (W) x 498mm (H) x 112mm (D)

**WEIGHT**

Net with stand (kg):	6.2kg (13.6lbs)
Net without stand (kg):	5.6kg (12.3lbs)
Gross (kg):	8.2kg (18.1lbs)

**REGULATIONS**

BSMI, RCM, GEMS, KC, BIS	
--------------------------	--

**WARRANTY**

\*Warranty offered may differ from market to market

**PACKAGE CONTENTS**

LCD Display  
Power Cable (1.5m)  
HDMI Cable (1.5m)  
Quick Start Guide  
\*Actual content may differ from market to market